

# MV-CA004-10UM/UC

0.4 MP 1/2.9" CMOS USB3.0 Area Scan Camera



GEN*i*CAM

US3™  
VISION


## Introduction

MV-CA004-10UM/UC camera adopts Sony® IMX 287 sensor to provide high-quality image. It uses USB3.0 interface to transmit non-compressed images in real time, and its max. frame rate can reach 526.5 fps in full resolution.

## Key Feature

- Supports auto and manual adjustment for gain, exposure control, LUT, Gamma correction, etc.
- Supports hardware triggering, software triggering and free run mode.
- Adopts M2 screw holes for securing cable that connects USB3.0 interface.
- Compatible with USB3 Vision Protocol, GenICam Standard, and the third-party software based on these protocol and standard.

## Dimension

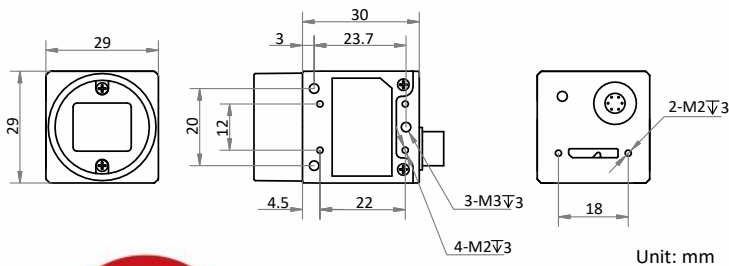


## Available Model

- Mono camera: MV-CA004-10UM
- Color camera: MV-CA004-10UC


## Applicable Industry

Electronic semiconductor, factory automation, liquor and beverage, medicine packing, etc.

## Sensor Quantum Efficiency

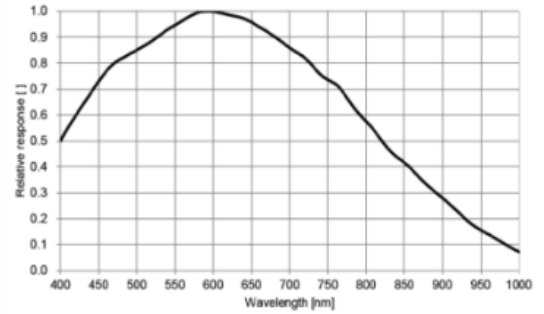

MV-CA004-10UM

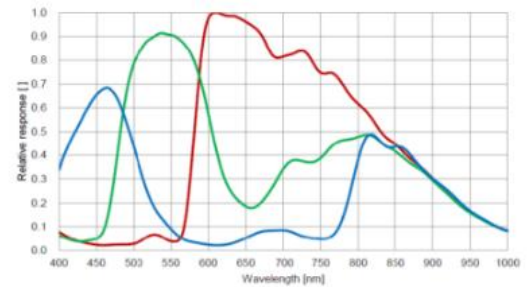

MV-CA004-10UC

**Aremak Bilişim Teknolojileri**  
Endüstriyel Görüntü İşleme Çözümleri

Adres: ODTÜ Teknokent Bilişim ve İnovasyon Merkezi,  
Mustafa Kemal Mahallesi, Dumlupınar Bulvarı No:280G,  
İç Kapı No:1260, Çankaya, Ankara/Türkiye

W: [www.aremak.com.tr](http://www.aremak.com.tr)  
E: [shop@aremak.com.tr](mailto:shop@aremak.com.tr)  
T: +908502551506



[en.hikrobotics.com](http://en.hikrobotics.com)



## Specification

| Model              | MV-CA004-10UM                                                                                                                                                                 | MV-CA004-10UC                                                                          |
|--------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|
| Camera             |                                                                                                                                                                               |                                                                                        |
| Sensor type        | CMOS, global shutter                                                                                                                                                          |                                                                                        |
| Sensor model       | Sony® IMX287                                                                                                                                                                  |                                                                                        |
| Pixel size         | 6.9 μm × 6.9 μm                                                                                                                                                               |                                                                                        |
| Sensor size        | 1/2.9"                                                                                                                                                                        |                                                                                        |
| Resolution         | 720 × 540                                                                                                                                                                     |                                                                                        |
| Max. frame rate    | 526.5 fps @720 × 540                                                                                                                                                          |                                                                                        |
| Dynamic range      | 74 dB                                                                                                                                                                         |                                                                                        |
| SNR                | 41 dB                                                                                                                                                                         |                                                                                        |
| Gain               | 0 dB to 20 dB                                                                                                                                                                 |                                                                                        |
| Exposure time      | UltraShort exposure mode: 1 μs to 14 μs                                                                                                                                       |                                                                                        |
|                    | Standard exposure mode: 15 μs to 10 sec                                                                                                                                       |                                                                                        |
| Exposure mode      | Off/ Once /Continuous exposure mode                                                                                                                                           |                                                                                        |
| Mono/color         | Mono                                                                                                                                                                          | Color                                                                                  |
| Pixel format       | Mono 8/10/10p/12/12p                                                                                                                                                          | Mono 8/10/12, Bayer RG 8/10/10p/12/12p, YUV422Packed, YUV422_YUYV_Packed, RGB 8, BGR 8 |
| Binning            | Supports 1 × 1, 2 × 2, 4 × 4                                                                                                                                                  |                                                                                        |
| Decimation         | Supports 1 × 1, 2 × 2, 4 × 4                                                                                                                                                  |                                                                                        |
| Reverse image      | Supports horizontal and vertical reverse image output                                                                                                                         |                                                                                        |
| Image buffer       | 128 MB                                                                                                                                                                        |                                                                                        |
| Electrical feature |                                                                                                                                                                               |                                                                                        |
| Data interface     | USB3.0, compatible with USB2.0                                                                                                                                                |                                                                                        |
| Digital I/O        | 6-pin Hirose connector provides power and I/O, including opto-isolated input × 1 (Line 0), opto-isolated output × 1(Line 1), and bi-directional non-isolated I/O × 1 (Line 2) |                                                                                        |
| Power supply       | 9 VDC to 24 VDC, supports USB3.0 power supply                                                                                                                                 |                                                                                        |
| Power consumption  | Typ. 3 W@5 VDC (USB3.0 provides power supply)                                                                                                                                 |                                                                                        |
| Mechanical         |                                                                                                                                                                               |                                                                                        |
| Lens mount         | C-Mount                                                                                                                                                                       |                                                                                        |
| Dimension          | 29 mm × 29 mm × 30 mm (1.1" × 1.1" × 1.2")                                                                                                                                    |                                                                                        |
| Weight             | Approx. 80 g (0.2 lb.)                                                                                                                                                        |                                                                                        |
| Ingress protection | IP30 (under proper lens installation and wiring)                                                                                                                              |                                                                                        |
| Temperature        | Working temperature: 0 °C to 50 °C (32 °F to 122 °F)<br>Storage temperature: -30 °C to 70 °C (-22 °F to 158 °F)                                                               |                                                                                        |
| Humidity           | 20% to 80% RH, non-condensing                                                                                                                                                 |                                                                                        |
| General            |                                                                                                                                                                               |                                                                                        |
| Client software    | MVS or third-party software meeting with USB3 Vision Protocol                                                                                                                 |                                                                                        |
| Operating system   | 32/64-bit Windows XP/7/10, 32/64-bit Linux and 64-bit MacOS                                                                                                                   |                                                                                        |
| Compatibility      | USB3 Vision, GenICam                                                                                                                                                          |                                                                                        |
| Certification      | CE, FCC, RoHS, KC                                                                                                                                                             |                                                                                        |

**HIKROBOT**

Hangzhou Hikrobot Co., Ltd.  
en.hikrobotics.com

© Hangzhou Hikrobot Co., Ltd. All Rights Reserved.

Hangzhou Hikrobot does not tolerate any infringement. Any organization or individual may not imitate or reproduce in whole or in part of the content. The data herein is based on Hikrobot's internal evaluation. Actual data may vary depending on specific configuration and operating condition. The information herein is subject to change without notice. All the content has been checked conscientiously. Nevertheless, Hikrobot shall not be liable to damages resulting from errors, inconsistencies or omissions.



**Aremak Bilişim Teknolojileri**  
Endüstriyel Görüntü İşleme Çözümleri

Adres: ODTÜ Teknokent Bilişim ve İnovasyon Merkezi,  
Mustafa Kemal Mahallesi, Dumlupınar Bulvarı No:280G,  
İç Kapı No:1260, Çankaya, Ankara/Türkiye

W: www.aremak.com.tr  
E: shop@aremak.com.tr  
T: +908502551506